


The **Chemola™ Delta HF Series** is a two-piece double check fitting that is designed for a positive seal under extreme conditions, such as hydrofluoric acid service. The top fitting is backed out a few turns, and the valve is lubricated using a Chemola™ Delta high-pressure grease gun. The top fitting is then screwed back into the bottom fitting until the tapered metal-to-metal seat forms a positive seal. The two-piece construction has one check ball in each of the two pieces. It is rated for service to 10,000 psi.

Materials

Component	Material
Body	1215 Low-carbon steel
Ball	Chrome alloy
Spring	302 SS

Ordering Information

Item Number	Unit Size
HF14-09	1/4" NPT thread
HF38-09	3/8" NPT thread
HF12-09	1/2" NPT thread

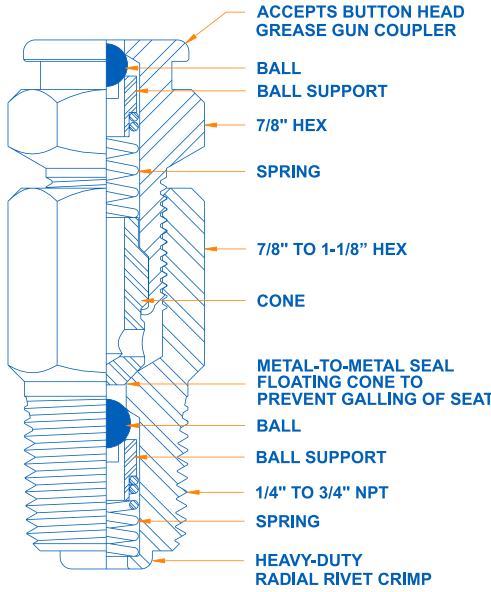

Also available in stainless steel.