



# AQUA POZO PVC

## PRODUCTION COMPOUND FOR THREADED PVC & CPVC CONNECTIONS

Aqua Pozo PVC is a special purpose lubricant/sealant for downhole water well PVC and CPVC connections. The base carrier provides a high level of multi-particle size PTFE, to assure leak tight seals and ease of breakout. It contains anti-galling components, oxidation inhibitors plus other lubricant stabilizers. This is a soft-set compound and will not harden or dry.


### TYPICAL CHARACTERISTICS

Appearance	White, grainy
NLGI	1
Penetration (ASTM D217)	300-330
Base Grease	Lithium complex
Temperature Range	0°F to 450°F (-18°C to 232°C)
Sulfur Content	20.3%



ITEM NUMBER	UNIT SIZE
0396006BT	½ Pint Can
0396012BT	1 Pint Can 12/Case
0396009BP	1 Gallon 9 lb. Black Plastic
0396018BP	2 Gallon 18 lb. Black Plastic
0396030BP	3.5 Gallon 30 lb. Black Plastic
0396045BP	5 Gallon 45 lb. Black Plastic

**Contains no lead or zinc**  
**Available in Arctic Grade**  
**DO NOT USE ON OXYGEN SERVICE**

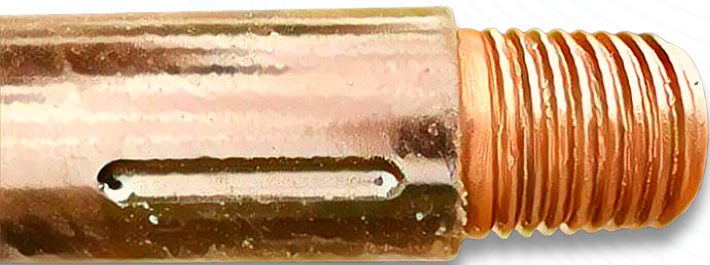

**ECO FRIENDLY** 

SOUTH COAST PRODUCTS WORKS HARD TO BE ENVIRONMENTALLY CONSCIOUS. AS A RESULT, WE ARE PROUD TO OFFER ECO-FRIENDLY PRODUCTS.



20 Southbelt Industrial Dr  
Houston, TX 77047  
713-225-0048  
socousa.com