

AQUA POZO Cu

COPPER BASED DRILLING COMPOUND

Aqua Pozo Cu is a premium tool joint compound formulated to prevent downhole make-up even under high drilling torques frequently experienced while water well drilling. It contains copper flake and other solid lubricants and additives in a high-quality grease base. It resists water washout and provides easy breakout without galling. Aqua Pozo Cu doubles as a premium anti-seize compound and high temperature lubricant for bolts, flanges, and studs.



ITEM NUMBER	UNIT SIZE
0391006BT	½ Pint Can
0391012BT	1 Pint Can 12/Case
0391009BP	1 Gallon 9 lb. Black Plastic
0391018BP	2 Gallon 18 lb. Black Plastic
0391030BP	3.5 Gallon 30 lb. Black Plastic
0391045BP	5 Gallon 45 lb. Black Plastic

Contains no lead or zinc
Available in Arctic Grade
DO NOT USE ON OXYGEN SERVICE


TYPICAL CHARACTERISTICS

Appearance	Copper, smooth
NLGI	7
Penetration (ASTM D217)	300-330
Base Grease	Lithium complex
Temperature Range	0°F to 500°F (-18°C to 260°C)
Friction Factor (API 7A1)	7.7
Sulfur Content	<0.15%





SOUTH COAST PRODUCTS WORKS HARD TO BE ENVIRONMENTALLY CONSCIOUS. AS A RESULT, WE ARE PROUD TO OFFER ECO-FRIENDLY PRODUCTS.

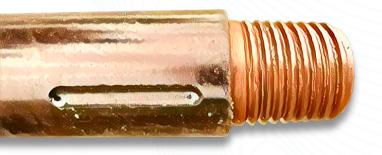



20 Southbelt Industrial Dr Houston, TX 77047 713-225-0048 socousa.com